



DESIGNED FOR AGRICULTURE & INDUSTRY

Technical data: UV-C TUBE WITH WATERPROOF HOUSE

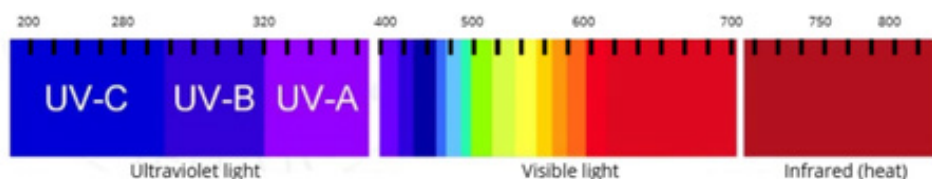

- ✓ **Ultraviolet light** (200–280 nm).
- ✓ **Germicidal effect:** inactivates **bacteria, viruses and fungi**.
- ✓ **Damages DNA/RNA**, preventing reproduction.
- ✓ **For sterilization**, water treatment and air purification/ventilation.
- ✓ **Chemical-free pathogen reduction in drinking water.**
- ✓ **Helps keep indoor air clean in high-exposure areas.**
- ✓ **Replaceable UV-C tube** in waterproof housing (with ballast) enables reuse.
- ✓ **Multi-holder:** stepless adjustment 100–1000 mm.
- ✓ **Warranty:** 3 years on waterproof housing, 1 year on UV-C tube.

Voltage	220-240V
Nominal lifetime	5 year
Driver	Yes - External
LED og DRIVER changeable	No
Double ends input	No
Screen material	Quartz Glas
Frequency	50/60 Hz
Dimmable	No
Recessed ceiling mount	No
Operating temperature	-10°C - + 50°C
Lamp base/Cap	G10Q



Item. no	UV	Watt	Length	$\mu\text{w}/\text{cm}^2$	Voltage (V)	Diameter(Ø)	Net weight	Compatible with
RWPUVC20	C - Ozon-fri	20W	490mm	2000	RUVC040204P	23mm	628g	RUVC040204P
RWPUVC80	C - Ozon-fri	80W	910mm	6000	RUVC080804P	23mm	754g	RUVC080804P
RWPUVC120	C - Ozon-fri	120W	1220mm	9000	RUVC1101204P	23mm	984g	RUVC1101204P
RWPUVC150	C - Ozon-fri	150W	1620mm	10000	RUVC1501504P	23mm	1110g	RUVC1501504P

TILBEHØR

Item. no	Product	Dimensions	Decription	Materiale
RUVC0001	Multiholder til UV-C rør med vandfast hus	Ø	Adjustable 100-1000mm	Stainless steel

Safety warning: UV-C radiation is harmful to skin and eyes. No people or animals may be present in the same room when the UV-C is switched on. Use only in enclosed/shielded installations and in accordance with applicable safety regulations.