


Installation Guidance

1 Mounting

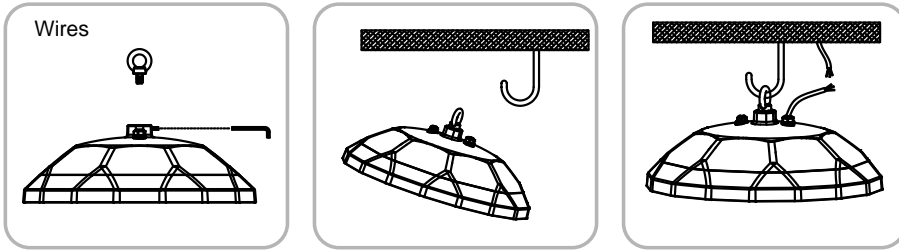

2 Wires

Single phase line	
Neutral (N)	
Protective Earth or Ground (PE)	
Dim +	
Dim -	

Make sure to connect all wires correctly, to avoid damaging the product

3 Input cable



Connect the male and female connectors tightly.



Make sure the cap is tightened all the way to the end

5 Remarks

- Be sure to fix the luminaire and tighten the connectors and caps properly/ fix wires correctly to avoid short circuit.
- Refer to the label on the luminaire for technical specifications.



USER'S MANUAL

STEALTH HIGH BAY



CONTENTS

Foreword	2
Safety Instructions	2
Important Information	3
Product Dimensions	3
Installation Types	3
Installation Guidance	4

Foreword

Thanks for choosing our Stealth LED High Bay. We strongly recommend you to read this manual carefully before installation. Make sure you have understood the assembly instructions correctly, to ensure the right performance of our Viking LED Luminaire.

- * Kontakt venligst RN Solutions ApS, hvis du ønsker brugermanualen på Dansk.
- * Vänligen kontakta RN Solutions APS, om du önskar manualen på Svenska.
- * Bitte kontaktieren Sie RN Solutions ApS, wenn Sie das Handbuch auf Deutsch verwenden möchten.

RN Solutions ApS

Phone +45 9838 5995

E-mail: info@rnsolutions.dk

Safety Instructions

In order to ensure product stability and a safe application, please kindly follow the instructions:

1. Before opening the package, please check if there has been damage or defect during transportation, if damage occurs, please do not use it and inform your supplier immediately.
2. Should the product be found damaged in any way, please do not unpack and contact your supplier in time.
3. Please do not attempt to use a damaged product.
4. The product should be installed, dismantled, and maintained only by a qualified electrician. This manual prohibits all mishandling of the supplied products and accessories like e.g., wrong installation etc.
 - **DISCLAIMER:** Suppliers do not take responsibility for any problems or damages that occurs due to mishandling the product.
5. The luminaires can be jet-washed. Keep a distance from luminaire of min. 70cm. Be sure not to use any sandpaper, polishing powder or alcohol, dissolvents, and similar liquids.
6. Do not connect the cables while the luminaire is powered on.


This manual applies to this specific product only.

For more information, please contact your supplier.

Important Information

- This product is only compatible with RNS Plug & Play system – Plug 5 and RNS Accessories, or for fixed installation and must be installed by an electrician.

Product Dimension (mm)

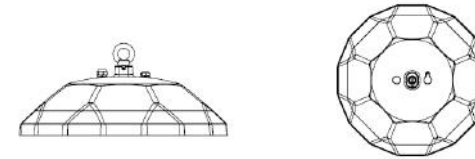

ITEM	SIZE Ø	POWER (W)	In-Rush Current & Time	Leakage Current
BHB150_120DP	435 mm	150W	45.0A, 315.0µs	0.7mA
BHB200C120DP	435 mm	200W	65.0A, 378.0µs	0.7mA
BHBHO200_120DP	435 mm	200W	65.0A, 378.0µs	0.7mA

Installation Types



Main installation type 1: Each High Bay is installed using a start cable into individual junction boxes.



Main installation type 2: The high bay lamps are installed in a series using RNS P&P5 T-Connectors.