Technical data: **Accessories**

SOW-LIGHT STRAW RACK

SOW-LIGHT™ STRAW RACK

Item No.	Product	Dimension	Description
D0025	RNS Straw Rack for SOW-LIGHT	1900 mm	3 mm. hot galvanized wire. Masks 75 x 100 mm.
FCB76	Powerful Cable Binders	7,6 X 300 mm	For mounting of STRAW RACK
FCB48	Cable Binders	4,8 x 215 mm	Cable Binders for fixing Cables etc.

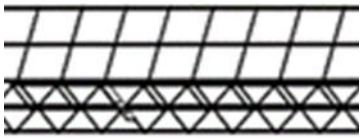



Fittings for mounting of RNS Plug´N Play™ Fixtures on RNS STRAW RACK

Item No.	Product	Dim.	Suitable for Luminaire	Material	Color
D0003	Screw fittings	20 x 48 mm	MODULAR-LIGHT	Aluminum	Alloy grey
D0006	Click fittings	16 x 57 mm	MODULAR-LIGHT	PVC	Grey
D0007	Click fittings	16 x 49 mm	BASIC FARM-LIGHT	PVC	Grey
W0010	Screw – self-drilling	2,9 x 19 mm		Stainless A2	
W0009	Screw – self-drilling	4,2 x 19 mm		Stainless A2	
W0012	Bolt	5 x 16 mm		Stainless A2	
W0013	Nut	M5		Stainless A2	
W0017	Bolt	6 x 25 mm		Stainless A2	
W0018	Nut	M6		Stainless A2	

Choose between RNS FARM-LIGHT or RNS MODULAR-LIGHT LED Luminaires (In USA and Canada DANISH FARM-LIGHT), see product sheet.
In addition, the SOW-LIGHT™ concept consists of 40 cm intermediate cables (F040P) between each luminaire.
In each row a further 1 piece. starter cable 150 or 300 cm. (F150POE or F300P) and end plug (D0001)
See data sheet: RNS SYSTEM CABLES - CABLES & ACCESSORIES

We refer to our sales, warranty and delivery terms on our website.

RN Solutions ApS | Hagensvej 14 | DK-9530 Støvring | Denmark
Tel.: +45 9838 5995 | info@RNSolutions.dk | www.rnsolutions.dk